



GOODS
PASSENGER/CAR LIFT
MIH/MDH

Reference

Date

Offer number

OFFER

ORDER

Delivery data (Compulsory to fill in)

Contact person and telephone

Name

Address

City/Country

Client code

Deleg. code

Delivery date

General characteristics

Rated load

 kg

Rated speed (m/s)

- 0.2 0.5*
 0.3 0.6*
 0.4

*For certain loads and travels

Power supply (±5%)

- 230V 3~ 50 hz
 400V 3~ 50 hz
 Others (specify)

Piping

- Rigid
 Flexible

Lenght

m

Lift-car characteristics

Type

- Passenger lift
 Vehicle lift

Ceiling/walls finishing

- Baked enamed plate (RAL 7032)
 Stainless steel
 Non standard colour
 RAL
 Galvanized steel

Floor type

- Steel chequered plate
 Stainless steel chequered plate
 Spotted black gum cover

Options

- Emergency trap door
 Extractor fan
 Wooden car side bumpers

Entrances

- 1
 2

Floor numbering

Door characteristics

Supply doors

- Yes
 4 H
 6 H
 8 H
 No
 Prepared for Selcom Hidraplus*
 Prepared for Fermator VVVF*

*Indicate the sill type

Car door finishing

- Baked enamel finishing
 Stainless steel finishing

Landing door finishing

- Baked enamel finishing
 Stainless steel finishing

Door tracking sill type

- Standard aluminium
 Strengthened aluminium
 Intube steel
 Strengthened steel

Landing door options

- Aluminium cover sill
 Cover joint for landing doors
 Baked enamel finishing
 Stainless steel finishing

Options

Mechanical options

- Accessories and power unit in wooden box
 Pit ladder

Hydraulic options

- Cylinder in two parts
 Oil cooling unit, pipe L= m
 Tank oil heater
 Re-levelling system with auxiliary motor
 Double switched pump unit
 Emergency auxiliary-pump unit

Electrical control options


- No electrical control components
 Landing push button key, specify quantity
 Cop with keys
 Shaft lighting
 Temperature control relay in machine room
 Standard two way intercom
 EN 81-28 two way intercom
 Lift-car machine-room intercom
 Positional display in landing, specify quantity
 Light barrier
 Traffic light, specify quantity
 Car parking helping system
 Door opening in case of electric breakdown
 Remote control option
 To call to only one level, number of zappers
 To call to all levels
 Standard fire alarm control option

Remarks

OFFER

ORDER

Dimensions

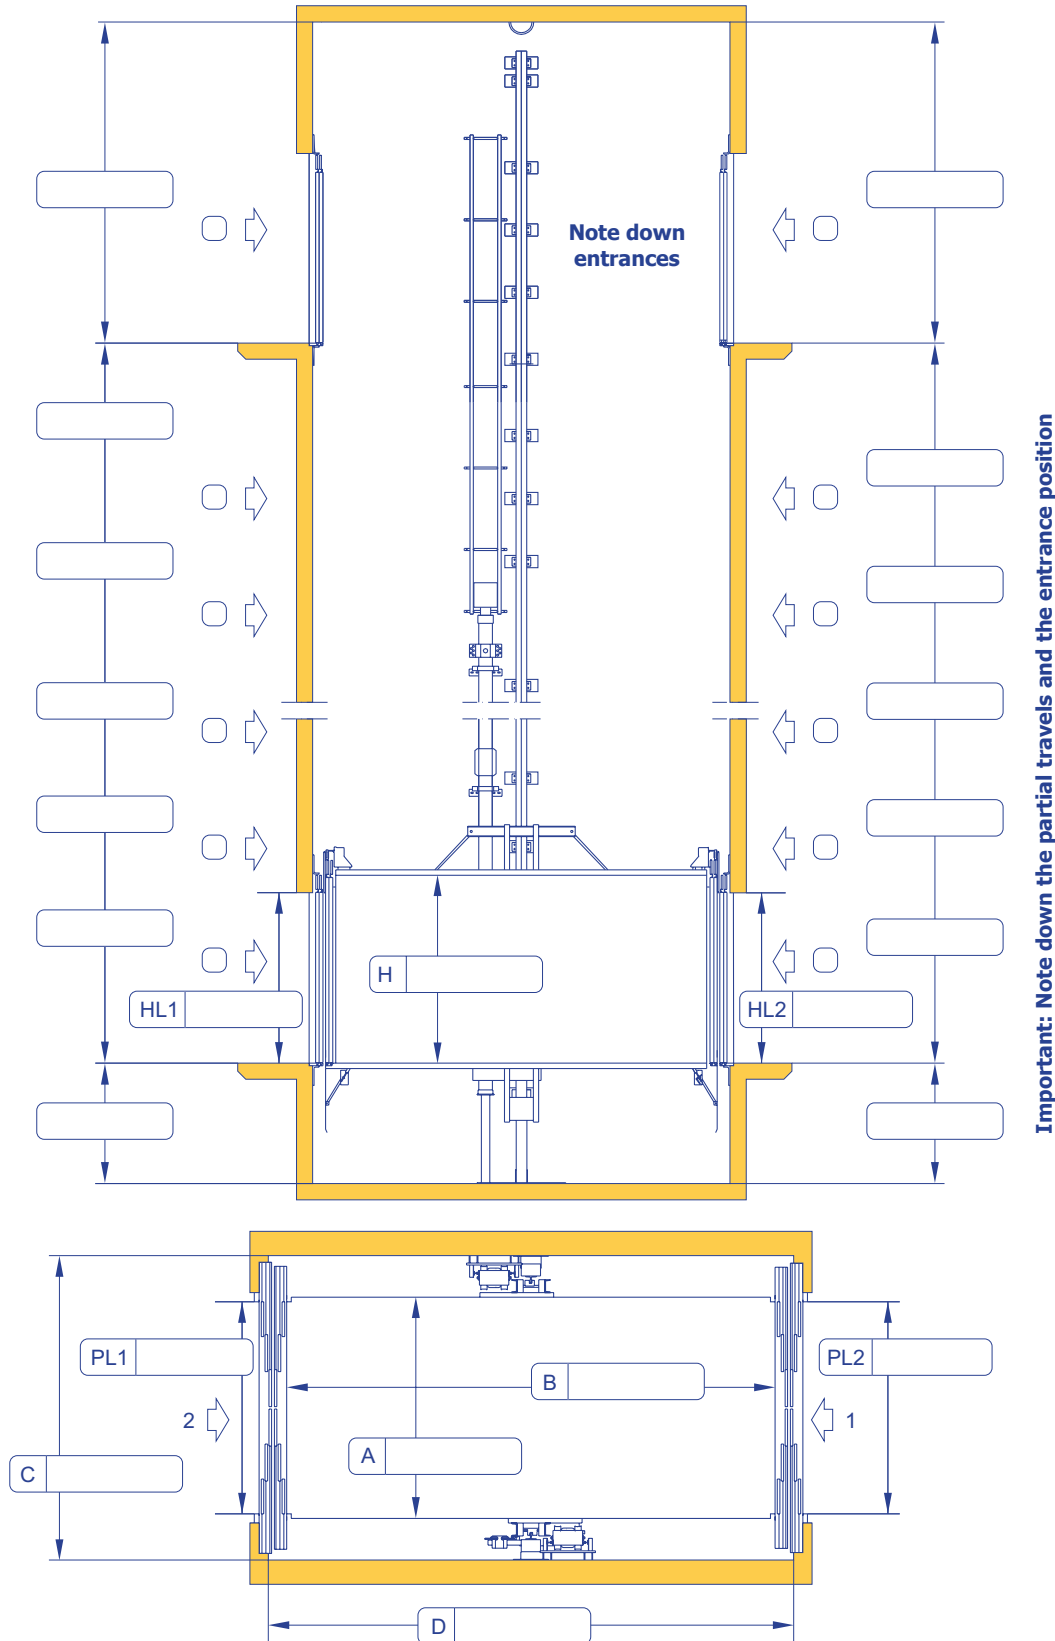

Notes

Up to 4m travels the direct action model MDH will be supplied, for the rest of travels MIH.
If the lift-car has only one entrance, indicate the sill projection so that the appropriate fixation type for it can be chosen.