

Delivery data (Compulsory to fill in)

Company name, contact person and telephone

Delivery address

Client code

Delegation code

Delivery date

General characteristics

Travel (R) mm

Load 150 Kg

Rated speed 0,1 m/s

Loading dim. 900 x 760 mm

Angle 0
($20^\circ \leq \alpha \leq 45^\circ$)

Hand (See drawing)

- Right hand
 Left hand

Power Supply ($\pm 5\%$)

- 230V 3~ 50 hz
 400V 3~ 50 hz
 230V 1~ 50 hz
 Other

Boarding layout (See drawing)

- At 180°
 At 90°

Piping

- Rigid
 Flexible

Lenght m

Guides fixed to

- To wall
 To Steps

Options

Finishing options

- Water proof
(delivery time: 5 weeks)
 Non estandar color, RAL

Mechanical options

- Special platform width (<760 mm)
 Supply chemical wall anchors

Control options

- Landing operating panels with keys
 Surface mounted push button box

 Machine room less cabinet

Packing options

- Accessories and sling in wooden box


Remarks

Dimensions

ESSENTIAL TO INDICATE THE MEASUREMENT OF EVERY OF THE STEPS (a,b)

1° (,)	2° (,)	3° (,)	4° (,)	5° (,)
6° (,)	7° (,)	8° (,)	9° (,)	10° (,)
11° (,)	12° (,)	13° (,)	14° (,)	15° (,)
16° (,)	17° (,)	18° (,)	19° (,)	20° (,)

TAKE NOT ONLY MEASUREMENTS OF THE STAIRS BUT OF EVERY STEP AS WELL.

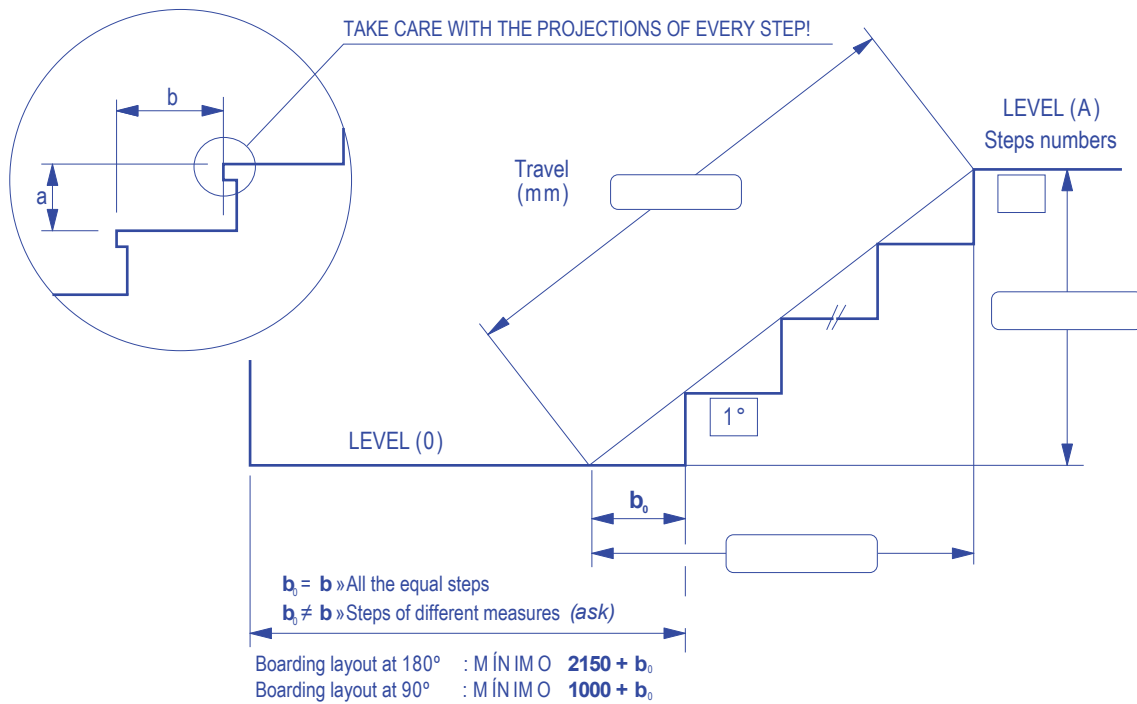

TAKE THE MEASUREMENT OF THE FREE SPACE FOR BUTTOM / TOP BOARDING.

